



SUGGESTED CUTOUT: FLUSH-MOUNT APPLICATION


METAL

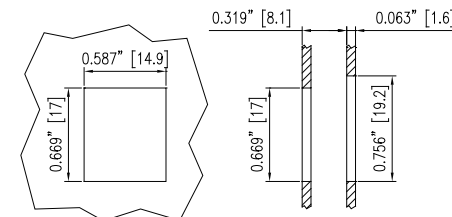

PLASTIC

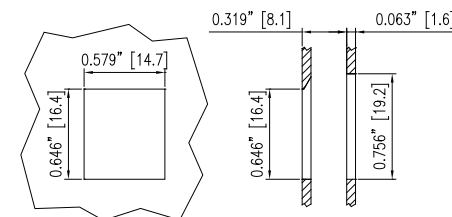

PIN ASSIGNMENTS



USOC

1

2

3

4

5

6

MATERIAL

Housing: High-impact Acrylonitrile Butadiene Styrene (ABS resin), UL 94 V-0 rated
 Jack Contacts: 5100W spring temper phosphor bronze round wire, $\varnothing=0.018$ in (0.45 mm), plated with 50 μ in (1.27 μ m) minimum thick hard gold over 100 μ in (2.54 μ m) minimum thick nickel underplate
 Contact Holder: High-impact PC+ABS polymer, UL 94 V-0 rated
 PCB: FR4, UL 94 V-0 rated
 IDC Terminals: C5191R-H phosphor bronze, $t=0.018$ in (0.45 mm), plated with 200 μ in (5.08 μ m) minimum thick tin over 50 μ in (1.27 μ m) minimum thick nickel underplate
 IDC Block: High-impact Polycarbonate (PC resin), UL 94 V-0 rated
 RoHS compliant



UL 1863
 COMMUNICATIONS-CIRCUIT
 ACCESSORIES

DRAWN BY
 Autumn Lee
 APPROVED BY
 Jerry Su

DIMENSIONS ARE [IN (MM)]
 TOLERANCES:

~0.8"	~2"	~6"	6"~	ANGLE
±0.007"	±0.015"	±0.02"	±0.06"	2°

3rd Angle
 Projection



Another quality product from
BLACK BOX
 724-746-5500 • www.blackbox.com

TITLE
 RJ-11 USOC Jack
 Blue

PARTS NO.

FMT238

DATE

2011/04/11

SCALE

X

SHEET

1/1

REV.

1