





ServSwitch™ Rackmount Kits for Mini-Size Models



You can use your ServSwitch Rackmount Kit to mount one of these ServSwitch family KVM switches in a 19", 23", or 24" rack: a ServSwitch™ Jr. (our product code SW621A, SW622A, SW621A-R2, or SW622A-R2), a ServSwitch™ Jr. MP (SW627A, SW628A, SW627A-R2, or SW628A-R2), or an -R3 or -R4 version ServSwitch or ServSwitch™ Ultra with a "mini-size" chassis (our product codes SW721A[E]-R3 or -R4, SW722A[E]-R3, original or -R2 KV5002MA[E], and KV5004MA[E]).

Each of these Kits consists of two rackmounting "ears" and four screws. To use a Kit to mount a ServSwitch or ServSwitch Ultra, take these steps, referring to the illustration below:

1. Match up the two holes in the "Switch end" of each Kit ear with the two empty screwholes on the side of the Switch, then fasten the ear to the Switch with two of the screws included with the Kit.
2. Once you've attached both ears, match the holes in the "rack end" of each ear to an appropriate set of matching holes on your equipment rack, then screw the Switch assembly to the rack using your own screws, bolts, or cage nuts (not included).

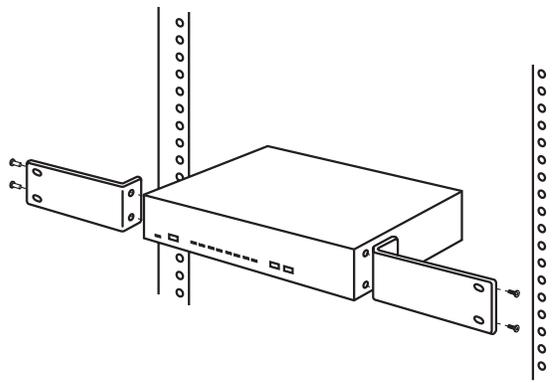

©Copyright 1999. Black Box Corporation. All rights reserved.

**CUSTOMER
SUPPORT
INFORMATION**

Order **toll-free** in the U.S.: Call **877-877-BBOX** (outside U.S. call **724-746-5500**)
FREE technical support 24 hours a day, 7 days a week: Call **724-746-5500** or fax **724-746-0746**
Mailing address: **Black Box Corporation**, 1000 Park Drive, Lawrence, PA 15055-1018
Web site: www.blackbox.com • E-mail: info@blackbox.com